

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

10059-400US (P23013-01)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

Not Yet Assigned 10/018303

INTERNATIONAL APPLICATION NO.

PCT/JP00/03275

INTERNATIONAL FILING DATE

22 May 2000 (22.05.00)

PRIORITY DATE CLAIMED

28 May 1999 (28.05.99)

## TITLE OF INVENTION

Polymer Electrolyte Fuel Cell And Method Of Using The Same

JC09 Rec'd PCT/PTO 30 OCT 2001

APPLICANT(S) FOR DO/EO/US

Osamu SAKAI et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). (21 pages)
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☒ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). (Executed)
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A copy of the International Search Report (PCT/ISA/210).

## Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail (EL916935561US)
23. ☒ Other items or information:

Copy of cover sheet of the PCT Publication of the Application (WO 00/74165 A1)  
7 Sheets of Formal Drawings

U.S. APPLICATION NO. (IF KNOWN) SEE 37 CFR 1.53 <b>10/018303</b> Not Yet Assigned		INTERNATIONAL APPLICATION NO. <b>PCT/JP00/03275</b>		ATTORNEY'S DOCKET NUMBER <b>10059-400US (P23013-01)</b>	
---	--	--	--	--	--

24. The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :</b>				<b>CALCULATIONS PTO USE ONLY</b>	
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1040.00</b>					
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$890.00</b>					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$740.00</b>					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$710.00</b>					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b>					
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>\$890.00</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				<b>\$0.00</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	5 - 20 =	0	x \$18.00	<b>\$0.00</b>	
Independent claims	2 - 3 =	0	x \$84.00	<b>\$0.00</b>	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$890.00</b>	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				<b>\$0.00</b>	
<b>SUBTOTAL =</b>				<b>\$890.00</b>	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				<b>\$0.00</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$890.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL FEES ENCLOSED =</b>				<b>\$890.00</b>	
				Amount to be refunded	\$
				charged	\$

a. ☒ A check in the amount of \$890.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 50-1017. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

**WILLIAM W. SCHWARZE**  
**AKIN, GUMP, STRAUSS, HAUER & FELD, L.L.P.**  
 One Commerce Square, Suite 2200  
 2005 Market Street  
 Philadelphia, PA 19103  
 Direct Dial: (215) 965-1270  
 Facsimile: (215) 965-1210  
 E-mail: wschwarze@akingump.com

*William W. Schwarze*

SIGNATURE

William W. Schwarze

NAME

25,918

REGISTRATION NUMBER

*October 30, 2001*

DATE

7/PRIS<sup>1</sup>

10/018303  
JCGS Rec'd PCT/PTO 30 OCT 2001

## POLYMER ELECTROLYTE FUEL CELL AND METHOD OF USING THE SAME

Also, disposed outside the electrode 14 are

THE UNIVERSITY OF CHICAGO

conductive separator plates 17, which mechanically fix an electrolyte membrane and electrode assembly 15 (hereinafter, referred to as "MEA") formed by the electrode 14 and the polymer electrolyte membrane 11, while connecting adjacent MEAs electrically in series, and which have a gas flow channel 16 on at least one surface thereof for supplying a reacting gas to the electrode 14 and carrying away a gas generated by the reaction and the remaining excess gas. Although the gas flow channel 16 can be provided separately from the separator plate 17, grooves are usually formed on the separator plate 17 to serve as the gas flow channel.

Further, on the other surface of the separator plate 17, which has the gas flow channel 16 on one surface thereof, a cooling water flow channel 18 for circulating a cooling water is formed in order to keep the cell temperature constant. By circulating a cooling water through this cooling water flow channel 18, thermal energy generated by the cell reaction can be utilized, for example, in the form of warm water.

As such a laminated-type cell, a so-called internal manifold type is common, in which a gas supply aperture, a gas discharge aperture, a cooling water supply aperture and a cooling water discharge aperture are secured inside the laminated cell. Here, FIG. 2 shows a schematic perspective view of a cell module comprising two unit cells in an internal manifold type polymer electrolyte fuel cell.

As is shown in FIG. 2, a polymer electrolyte

membrane 21, a catalytic reaction layer 22, a diffusion layer 23 and a separator plate 24 are laminated to form a unit cell, and a gas flow channel 25 is formed on the separator plate 24. Then, a manifold 26, through which a gas is supplied to or discharged from the cell, and a manifold 27, through which water for cooling the cell is supplied or discharged, are formed.

Further, in the above polymer electrolyte fuel cell, it is necessary to clamp the entire stack constantly in order to decrease an electrical contact resistance between the components such as bipolar plates disposed in a stack obtained by laminating unit cells. For this purpose, it is effective to provide two end plates on both ends of the stack obtained by laminating many unit cells in one direction, and fix the stack between the two end plates by means of a clamping member. Also, it is preferred to clamp the stack on the whole surface of each unit cell as uniformly as possible, and a metal material such as stainless steel is generally used as the clamping member for the end plates or the like from the standpoint of the mechanical strength.

However, in the above polymer electrolyte fuel cell, a plurality of unit cells are laminated electrically in series, so that the performance of the fuel cell as a whole is deteriorated when only one unit cell of low performance due to a manufacturing failure or one unit cell whose performance has been deteriorated during the operation of the cell is present

in the stack. Additionally, since the above polymer electrolyte fuel cell stack is constantly clamped from both ends, it is difficult to remove a unit cell of low performance alone and replace the same.

Therefore, the present invention provides a polymer electrolyte fuel cell which allows an easy removal of a defective unit cell from the stack and the replacement thereof and the method of using the same.

#### Disclosure of Invention

In order to achieve the foregoing object, the present invention provides a polymer electrolyte fuel comprising a stack containing a plurality of unit cells laminated, compressed and retained via a retaining plate, the cell comprising a pair of electrodes sandwiching a polymer electrolyte membrane therebetween and conductive separator plates having a gas flow channel on at least one surface thereof and sandwiching the above electrodes, wherein the retaining plate forms a gap between the unit cells.

In the above fuel cell, it is effective that the retaining plate is composed of two plates each having an undulate cross section and has hollow sections which are separated from one another, and a cooling water flows through the hollow sections between the unit cells. In other words, it is effective that the retaining plate functions as a cooling water flow channel.

It is also effective that the conductive separator plate is provided for every two unit cells and has a cooling water flow channel, and the retaining plate is provided for every one cell module comprising a plurality of the above unit cells.

Further, it is effective that the fuel cell comprises a voltage measurement jig and a voltage display device for the unit cell.

Further, the present invention also relates to a method of using the above fuel cell.

More specifically, the present invention also relates to a method of using a polymer electrolyte fuel cell comprising: a stack containing a plurality of unit cells laminated, compressed and retained via a retaining plate, the unit cell comprising a pair of electrodes sandwiching a polymer electrolyte membrane therebetween and conductive separator plates having a gas supply channel on at least one surface thereof and sandwiching the above electrodes; a voltage measurement jig; and a voltage display device for the above unit cell, wherein the retaining plate forms a gap between the unit cells or between the cell modules each comprising a plurality of the unit cells,

the method comprising the steps of: measuring the voltage of the unit cell or the cell module; and replacing the unit cell or the cell module when the voltage of the unit cell or the cell module is detected to be predetermined value or

less.

According to this using method, it is possible to readily replace a defective unit cell or a cell module comprising a plurality of such unit cells in a polymer electrolyte fuel cell stack.

#### Brief Description of Drawings

FIG. 1 is a partial sectional view schematically showing a conventional polymer electrolyte fuel cell.

FIG. 2 is a schematic perspective view of a cell module comprising two unit cells in an internal manifold type polymer electrolyte fuel cell.

FIG. 3 is a diagram illustrating a method of producing a polymer electrolyte fuel cell in accordance with the present invention.

FIG. 4 is a schematic perspective view of the polymer electrolyte fuel cell produced in Example 1.

FIG. 5 is a schematic sectional view of a relevant part of the fuel cell of the present invention shown in FIG. 4.

FIG. 6 is a graph showing the performance of the polymer electrolyte fuel cell of Example 1.

FIG. 7 is a schematic sectional view of a relevant part of the polymer electrolyte fuel cell produced in Example 2.

#### Best Mode for Carrying Out the Invention

The present invention provides a polymer electrolyte fuel cell comprising a stack containing a plurality of unit cells laminated, compressed and retained via a retaining plate, the unit cell comprising a pair of electrodes sandwiching a polymer electrolyte membrane therebetween and conductive separator plates having a gas supply channel on at least one surface thereof and sandwiching the electrodes, wherein the retaining plate forms a gap between the unit cells.

By forming a gap between the unit cells by means of the retaining plate in this manner, a unit cell with a defect such as decreased voltage can be readily removed from the stack and replaced with a new unit cell.

Herein, descriptions will be made on the retaining plate. The material, which constitutes the retaining plate used in the present invention, is not particularly restricted as long as it has conductivity so as to decrease an electrical contact resistance and to prevent the insulation between unit cells, is capable of fixing the unit cells in the stack and is not damaged by the pressure in the laminating direction of the stack. Specific examples of such material include, for instance, metal such as stainless steel (SUS).

Also, the shape of the retaining plate is not particularly restricted as long as it is a shape capable of forming a gap between the unit cells while allowing the removal and installation of the unit cell from and in the stack. Examples of the shape of the cross section include,

for instance, undulate, saw blade and concavo-convex.

Additionally, a porous metallic material such as a spongy metal or a compressing jig composed of two metal plates with a spring interposed therebetween, can also be used in order to form a gap in the present invention.

Further, in the present invention, it is preferred to use, as the retaining plate, a retaining plate which is formed by bonding together two plates having an undulate cross section at the ridges of the plates and which has hollow sections that are separated from one another. Since the hollow sections are also separated from other constituting elements of the stack, the retaining plate can function as a cooling water flow channel by allowing a cooling water to flow through a part of the plural hollow sections. In this case, the cooling water is allowed to flow especially through the hollow sections located at the center of the retaining plate.

Also, a cooling water, an oxidant gas and a fuel gas may be supplied and discharged through the manifolds disposed at the sides of the stack.

When the retaining plate composed of two plates is used in this manner, there is a fear that the compactness may become inferior, as compared with a common stack structure in which unit cells are laminated and then compressed from both ends; however, the compactness can be maintained by utilizing, as the cooling water flow channel, the inner hollow sections formed by placing the two plates each having an undulate cross

section one upon another.

Also, in a polymer electrolyte fuel cell of the present invention, the retaining plate may be provided for every one unit cell supported by conductive separators at the top and bottom thereof (the details will be described later with reference to FIG. 5), or alternatively, the retaining plate may be provided for every two unit cells. In the case of the latter, for example, the conductive separator disposed between the two unit cells may be provided with a gas flow channel on the both surfaces thereof, the conductive separator disposed at the top or bottom of each of the two unit cells may be provided with a gas flow channel on one surface thereof, and the retaining plate may be disposed between the cell modules each comprising two unit cells.

However, the number of unit cells included in the cell module comprising a plurality of unit cells is not particularly restricted, and the retaining plate may be disposed between the cell modules each comprising a plurality of the unit cells, while forming the cooling water flow channel between the conductive separators, as will be explained later with reference to FIG. 7. In addition, the retaining plate also forms a cooling water flow channel in FIG. 7.

As discussed above, the provision of the retaining plate between the unit cells or the cell modules each comprising a plurality of unit cells is advantageous in that

it allows the replacement of the unit cells or the cell modules.

Therefore, it is effective that a polymer electrolyte fuel cell of the present invention comprises a voltage measurement device and a voltage display device for the unit cell. By providing such voltage measurement device and voltage display device, it is possible to quickly and precisely detect and replace a defective unit cell with decreased voltage or a cell module comprising the above unit cell.

Further, a polymer electrolyte fuel cell of the present invention may adopt a conventional structure in which a stack comprising the unit cell, the conductive separator and the retaining plate laminated is clamped, while being compressed, at the both ends in the laminating direction thereof to be fixed. In this case, if unclamped, the unit cell or the cell module can be replaced. Also, by adopting another structure in which the fuel cell is formed by inserting a stack into a cabinet having a predetermined dimension, the unit cells or the cell modules aligned in one direction can be removed and installed from one side of the cabinet of the stack, for example.

Additionally, as for the manifold used for supplying and discharging a gas and a cooling water, a so-called external manifold may be used as described above.

Further, the present invention also relates to a

method of using the above fuel cell.

More specifically, the present invention also relates to a method of using a polymer electrolyte fuel cell comprising: a stack containing a plurality of unit cells laminated, compressed and retained via a retaining plate, the unit cell comprising a pair of electrodes sandwiching a polymer electrolyte membrane therebetween and conductive separator plates having a gas supply channel on at least one surface thereof and sandwiching the electrodes therebetween; a voltage measurement jig; and a voltage display device for the unit cell, wherein the retaining plate forms a gap between the unit cells or between cell modules each comprising a plurality of the unit cells, the method comprising the steps of: measuring the voltage of the unit cell or the cell module; and replacing the unit cell or the cell module when the above voltage of the unit cell or the cell module is detected to be predetermined value or less.

In the following, a polymer electrolyte fuel cell of the present invention will be more concretely described with reference to drawings. However, the present invention is not limited to these.

#### Example 1

A method of producing a fuel cell in accordance with the present invention will be described with reference to FIG.

3.

FIG. 3 is a diagram illustrating a method of producing a polymer electrolyte fuel cell in accordance with the present invention.

First, a carbon powder having a particle size of several microns or less is immersed in an aqueous solution in which equimolar chloroplatinic acid and ruthenium chloride acid were dissolved, and a platinum-ruthenium catalyst was carried on the surface of the carbon powder by reduction. Here, the weight ratio between carbon and the carried catalyst was 1:1. Subsequently, the catalyst carrying carbon powder was dispersed in an alcohol solution of a polymer electrolyte to yield a slurry.

Meanwhile, a carbon paper having a thickness of 400  $\mu\text{m}$  serving as the electrode base material (diffusion layer) was impregnated with an aqueous dispersion of a fluorocarbon resin (Neoflon ND-1 manufactured by DAIKIN INDUSTRIES, Ltd.), and it was then dried and heat-treated at 400°C for 30 minutes to impart water repellency to the carbon paper.

Next, the slurry containing the carbon powder was uniformly applied onto one surface of the carbon paper serving as a diffusion layer, which had been subjected to water repellency, to form a catalytic reaction layer, thereby obtaining an electrode comprising the diffusion layer and the catalytic reaction layer.

Then, as indicated with (a) in FIG. 3, two sheets of

an electrode 33 comprising a diffusion layer 31 and a catalytic reaction layer 32 were placed on both surfaces of a polymer electrolyte membrane 34 having a bigger dimension than the electrode 33 in such a manner that each of the surfaces having the catalytic reaction layer 32 was faced with the polymer electrolyte membrane 34 and positioned at the center of the polymer electrolyte membrane 34, and a gasket 38 made of silicone rubber was further provided. Thereafter, it was hot-pressed at 100°C for 5 minutes to obtain an electrolyte membrane and electrode assembly (MEA) 35. Subsequently, the MEA 35 was cut into a size having a length of 20 cm and a width of 10 cm.

As indicated with (b) in FIG. 3, the obtained MEA 35 was sandwiched by a pair of separator plates 36 to give a unit cell. As the separator plates 36, ones made of carbon having air-tightness and a thickness of 4 mm were used. Also, on the surfaces of the separator plates 36 in contact with the MEA 35, a gas flow channel having a width of 2 mm and a depth of 1 mm was formed by cutting.

As the end plates disposed at the top and bottom which form a stack comprising unit cells, end plates made of SUS were used, and a retaining plate 37 composed of two plates was arranged parallel to these end plates at regular intervals so as to form a frame into which the unit cell was to be inserted. As the retaining plate 37, an SUS plate having an undulate cross section was used, whose surface had been coated

with  $3\mu\text{m}$  of Au plating for improving the corrosion resistance and decreasing the contact resistance.

In the fuel cell of this example, 30 frames were formed, each of which a unit cell could be inserted into, and manifolds 41 and 42 were disposed on both sides of the stack via an insulating material 43 and a gasket 44 as shown in FIG. 4. Through the manifolds 41 and 42, hydrogen, air and a cooling water were supplied and discharged. FIG. 4 is a schematic perspective view of the polymer electrolyte fuel cell produced in this example.

Also, FIG. 5 shows a schematic sectional view of a relevant part of the fuel cell of the present invention shown in FIG. 4. In a retaining plate 60 composed of two plates each having an undulate cross section, only several aligned hollow sections at the center, where the manifold 42 for a cooling water was in contact with the cross section of the retaining plate 60, were used as the cooling water flow channel, among a plurality of aligned hollow sections which were separated from one another.

On the fuel cell produced in the above manner, a performance test was conducted by using a simulated reformed gas (80 % by volume of hydrogen, 20 % by volume of carbon dioxide and 100 ppm of carbon monoxide) as a fuel gas and air as an oxidant gas. The performance test was conducted by means of a gas humidifier, under the conditions of a hydrogen utilization ratio of 70%, an oxygen utilization ratio of 20%,

10018303 103074

a bubbler temperature for humidifying hydrogen of 85°C, a bubbler temperature for humidifying air of 75°C, a cell temperature of 75°C and a current density of 0.7 A/cm<sup>2</sup>. In this performance test, the operation of the cell was performed while measuring the voltage of each unit cell, and after the start of the operation, a unit cell whose closed circuit voltage dropped to 0.4 V was taken out and a new unit cell was inserted to continue the operation of the cell. Herein, the operation was suspended during the replacement of the unit cell. FIG. 6 shows the relation between the time at which the replacement of the unit cell was conducted after the start of the operation of the fabricated fuel cell and the closed circuit voltage of the fuel cell. Additionally, FIG. 6 shows the performance of the fuel cell in the case where the operation was continuously performed without conducting the above replacement, for comparison. FIG. 6 demonstrates that according to the present invention, it is possible to readily replace a unit cell with deteriorated performance thereby to maintain the performance of the fuel cell for a long period.

#### Example 2

A cell module comprising a plurality of unit cells was configured, and a polymer electrolyte fuel cell which allowed the replacement of the entire cell module was fabricated by using the retaining plate 37 composed of two plates each having an undulate cross section, as in Example 1.

FIG. 7 shows a schematic sectional view of a relevant part of the polymer electrolyte fuel cell produced in this example.

In this example, four unit cells were included in one cell module, and a fuel cell comprising eight cell modules, i.e., 32 unit cells, was fabricated. In order to reduce the variation of temperature among the unit cells, one cell module was designed such that every two unit cells were disposed between cooling water flow channels 78 and 78' in the cell module. Both a cooling water flowing through the cell module and a cooling water flowing through the cooling water flow channel 78' composed of the hollow sections in a retaining plate 80 were supplied and discharged through the cooling water manifolds.

The rest of the structure was the same as that of the fuel cell of Example 1 shown in FIG. 5. In FIG. 7, numeral 71 denotes a polymer electrolyte membrane, numeral 72 denotes a catalytic reaction layer, numeral 73 denotes a diffusion layer, numeral 74 denotes an electrode and numeral 75 denotes an MEA.

On the fuel cell fabricated in the above manner, a performance test was conducted by using a simulated reformed gas (80 % by volume of hydrogen, 20 % by volume of carbon dioxide and 100 ppm of carbon monoxide) as a fuel gas and air as an oxidant gas. The performance test was conducted as in Example 1, under the conditions of a hydrogen utilization ratio of 70%, an oxygen utilization ratio of 20%, a bubbler

temperature for humidifying hydrogen of 85°C, a bubbler temperature for humidifying air of 75°C, a cell temperature of 75°C and a current density of 0.7 A/cm<sup>2</sup>. Also, in the test, the operation of the cell was performed while measuring the voltage of each unit cell, and after the start of the operation, the cell module including a unit cell, whose closed circuit voltage dropped to 0.4 V, was taken out and a new cell module was inserted to continue the operation of the cell.

After the replacement of the module was conducted twice, the voltage of the fuel cell which had been operated for a cumulative total of 1600 hours dropped to 18.91 V, whereas the initial voltage was 19.11 V, confirming that a high performance was maintained for a long period. From this result, it was confirmed that the cell stack as a whole maintained a high performance over a long period by replacing a unit cell with deteriorated performance.

Here, an example was shown in the case of replacing a unit cell whose performance had been deteriorated during the operation of fuel cell; however, by adopting the structure of this example and applying it to, for instance, the final product check during the manufacturing of the fuel cell at a factory and replace only those unit cells with deteriorated performance, it is possible to reduce the manufacturing cost significantly.

Industrial Applicability

1  
 2  
 3  
 4  
 5  
 6  
 7  
 8  
 9  
 10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525

## CLAIMS (amended)

1. (amended) A polymer electrolyte fuel cell comprising a stack containing a plurality of unit cells laminated, compressed and retained via a retaining plate, said unit cell comprising a pair of electrodes sandwiching a polymer electrolyte membrane and conductive separator plates having a gas supply channel on at least one surface thereof and sandwiching said electrodes,

wherein said retaining plate forms a gap between said unit cells such that said unit cell or a cell module comprising a plurality of said unit cells between said retaining plates is removed and installed.

2. (amended) The polymer electrolyte fuel cell in accordance with claim 1, wherein said retaining plate is composed of two plates having an undulate cross section and has hollow sections which are separated from one another, and a cooling water flows through said hollow sections between said unit cells or said cell modules comprising a plurality of said unit cells.

3. The polymer electrolyte fuel cell in accordance with claim 1, wherein said conductive separator plate is provided for every two unit cells and has a cooling water flow channel, and said retaining plate is provided for every one cell module comprising a plurality of said unit cells.

4. The polymer electrolyte fuel cell in accordance

with claim 1, comprising a voltage measurement jig and a voltage display device for said unit cell.

5. A method of using a polymer electrolyte fuel cell comprising: a stack containing a plurality of unit cells laminated, compressed and retained via a retaining plate, said unit cell comprising a pair of electrodes sandwiching a polymer electrolyte membrane and conductive separator plates having a gas supply channel on at least one surface thereof and sandwiching said electrodes; a voltage measurement jig; and a voltage display device for said unit cell, wherein said retaining plate forms a gap between said unit cells or between cell modules each comprising a plurality of said unit cells, said method comprising the steps of:

measuring a voltage of said unit cell or said cell module; and

replacing said unit cell or said cell module when said voltage of said unit cell or said cell module is detected to be a predetermined value or less.

FIG. 1


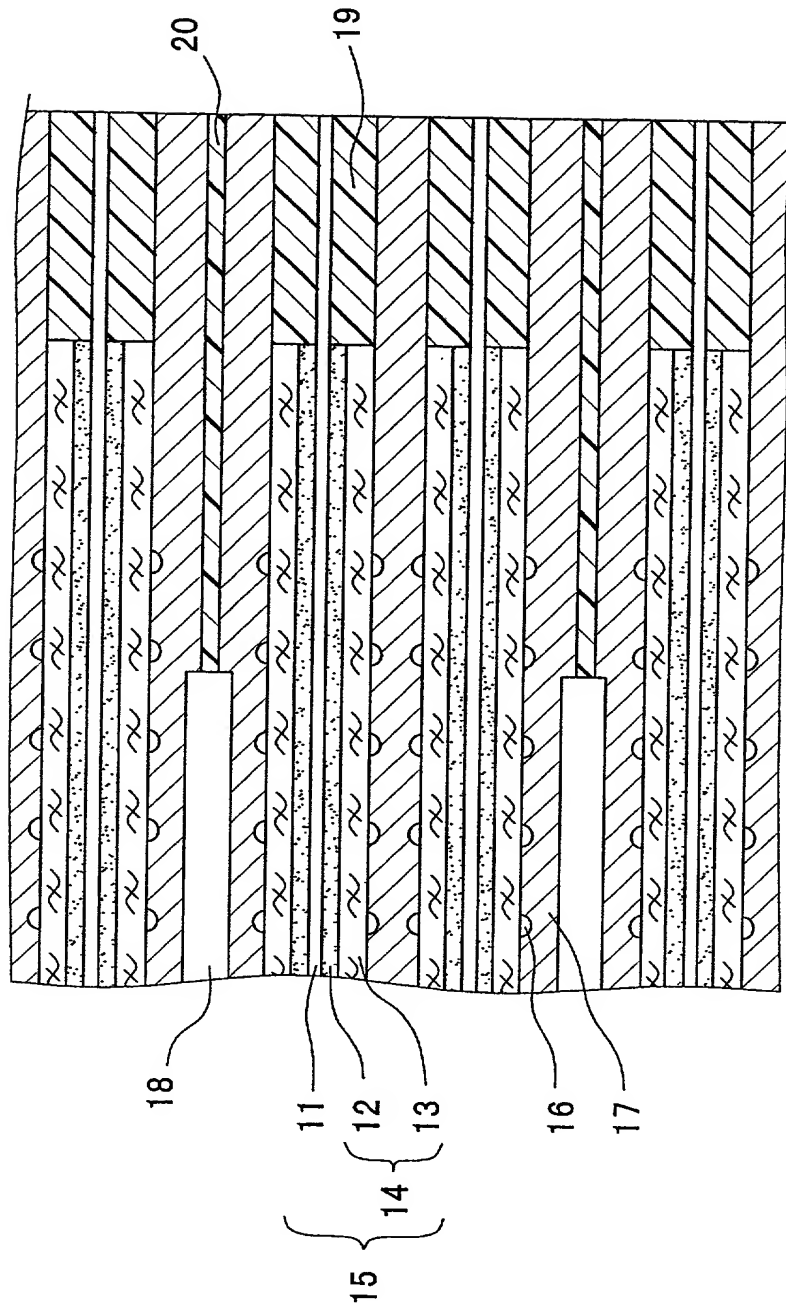


FIG. 2

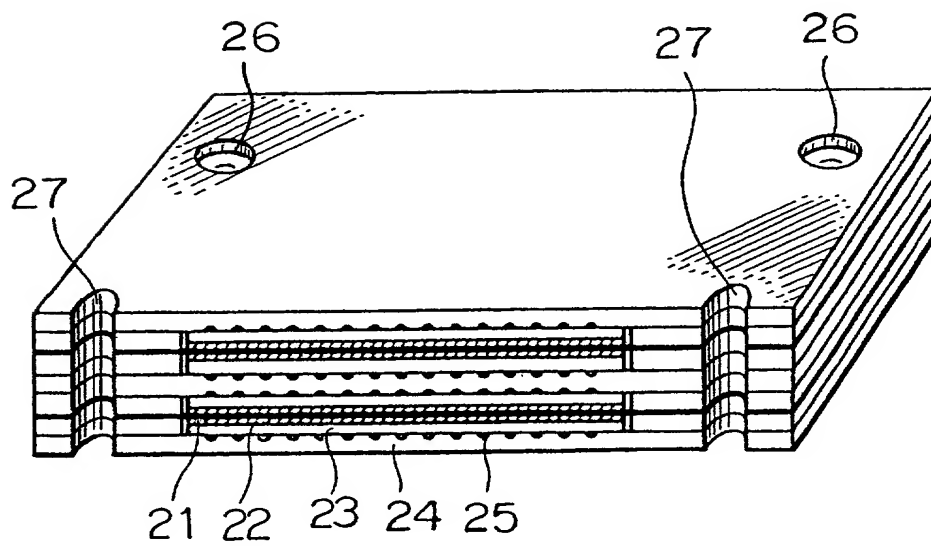

10/010103

FIG. 3

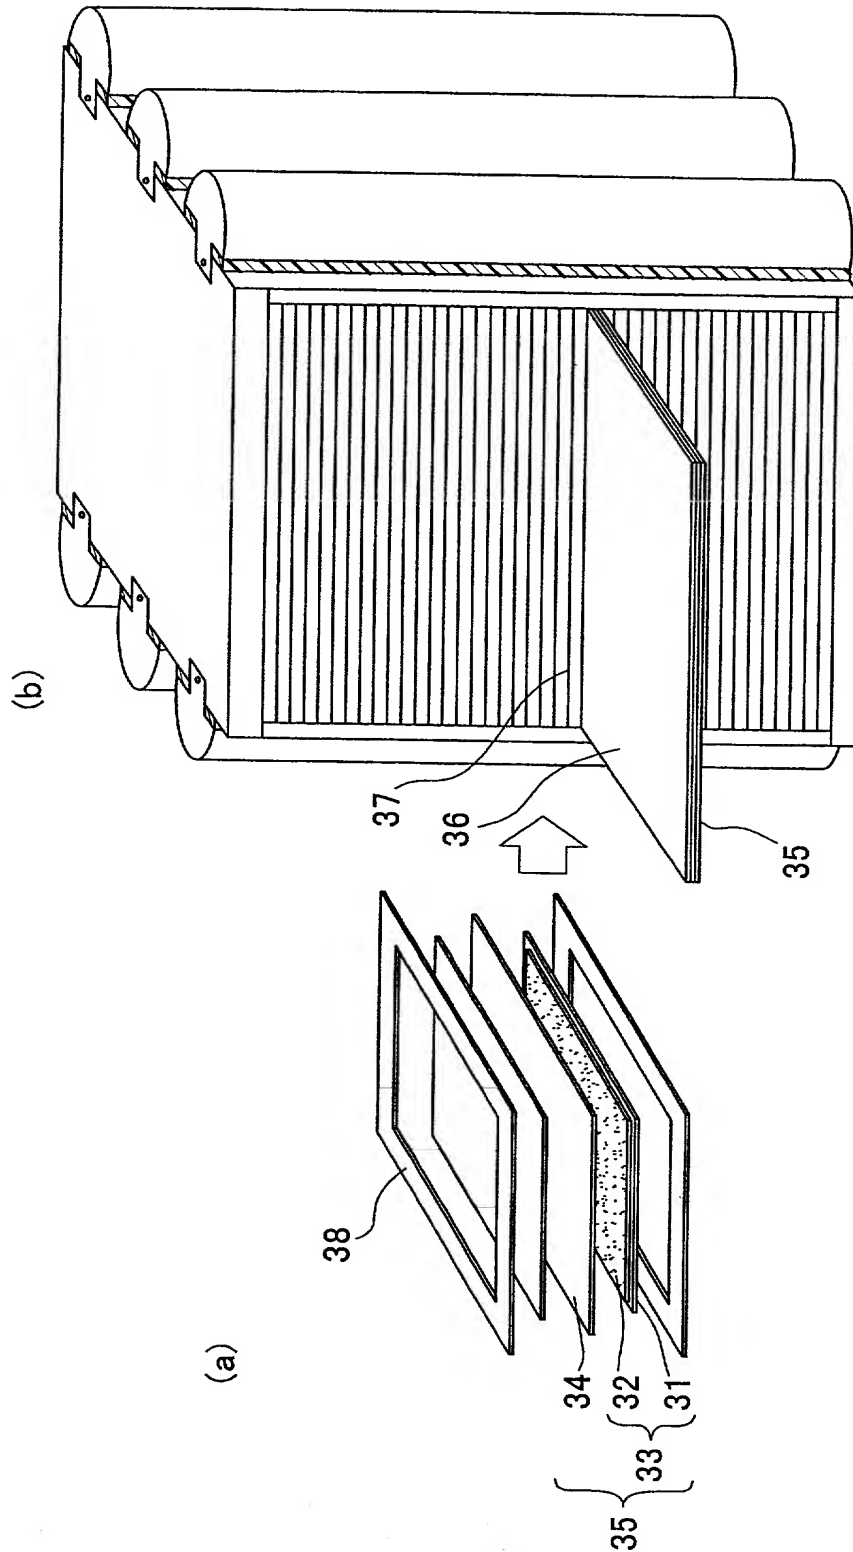


FIG. 4


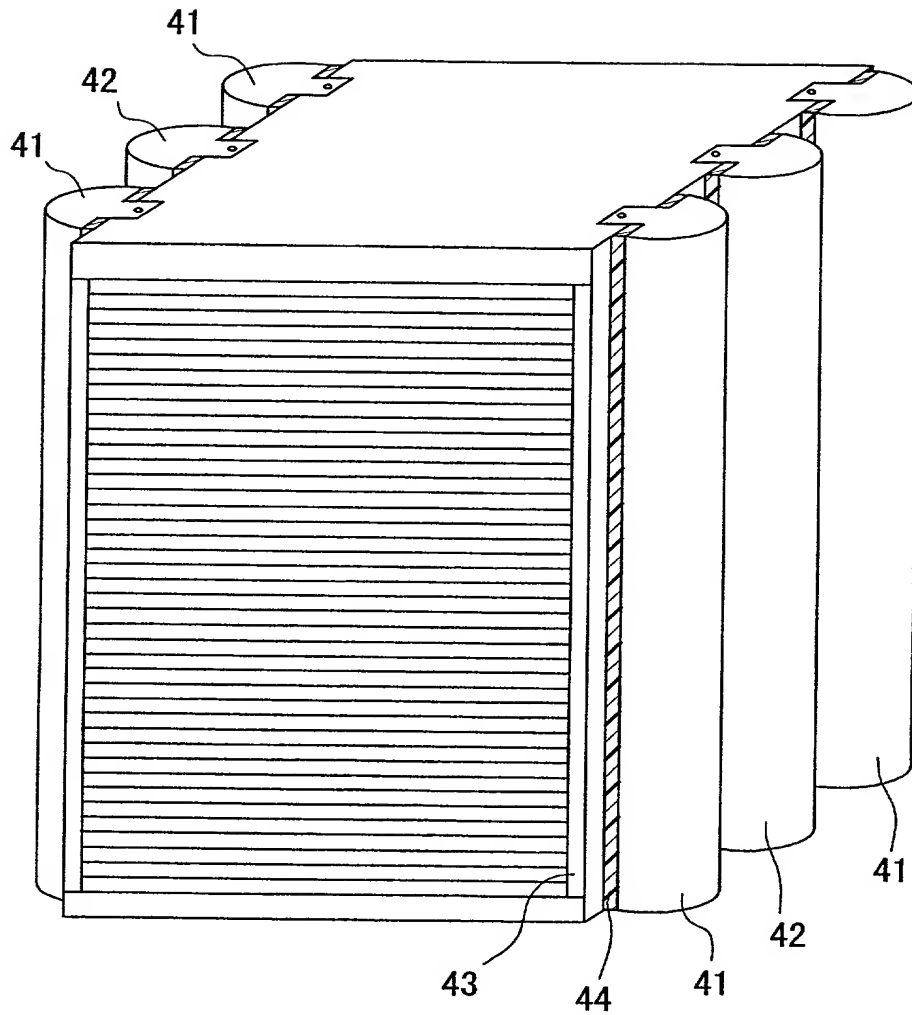


FIG. 5

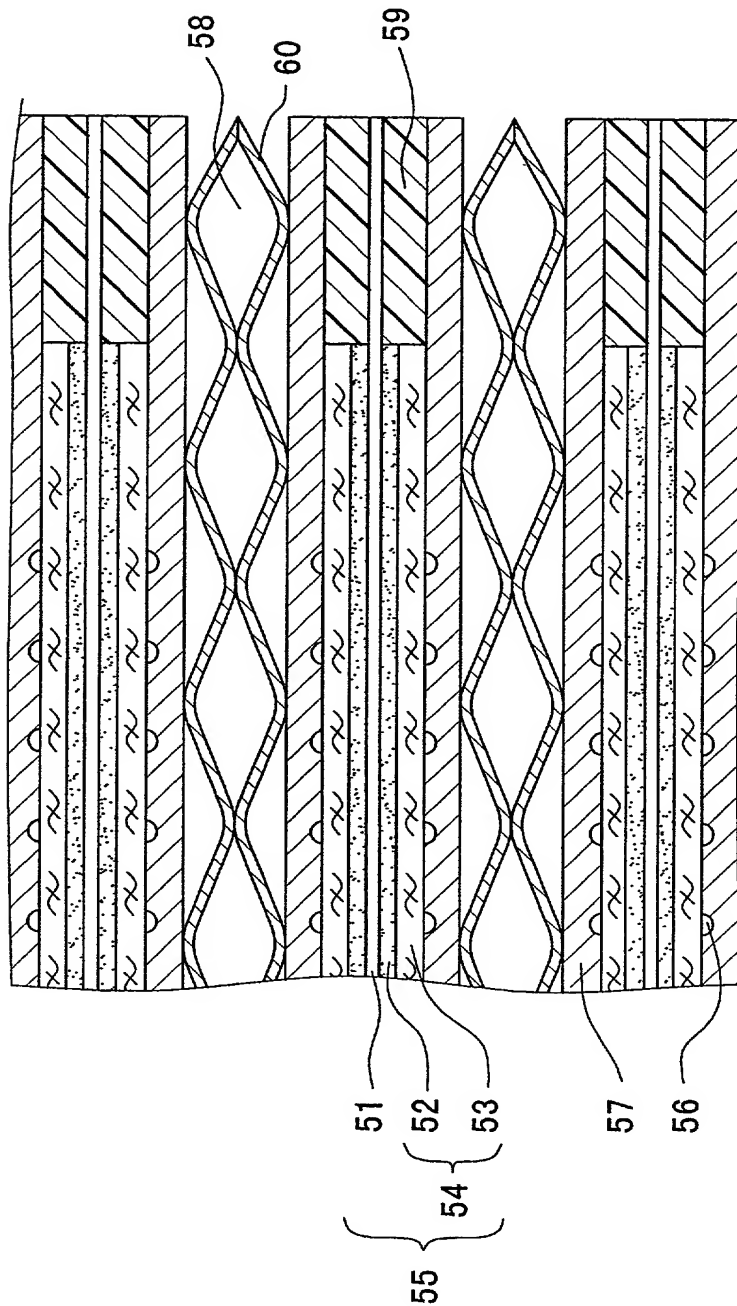

10/018385

FIG. 6


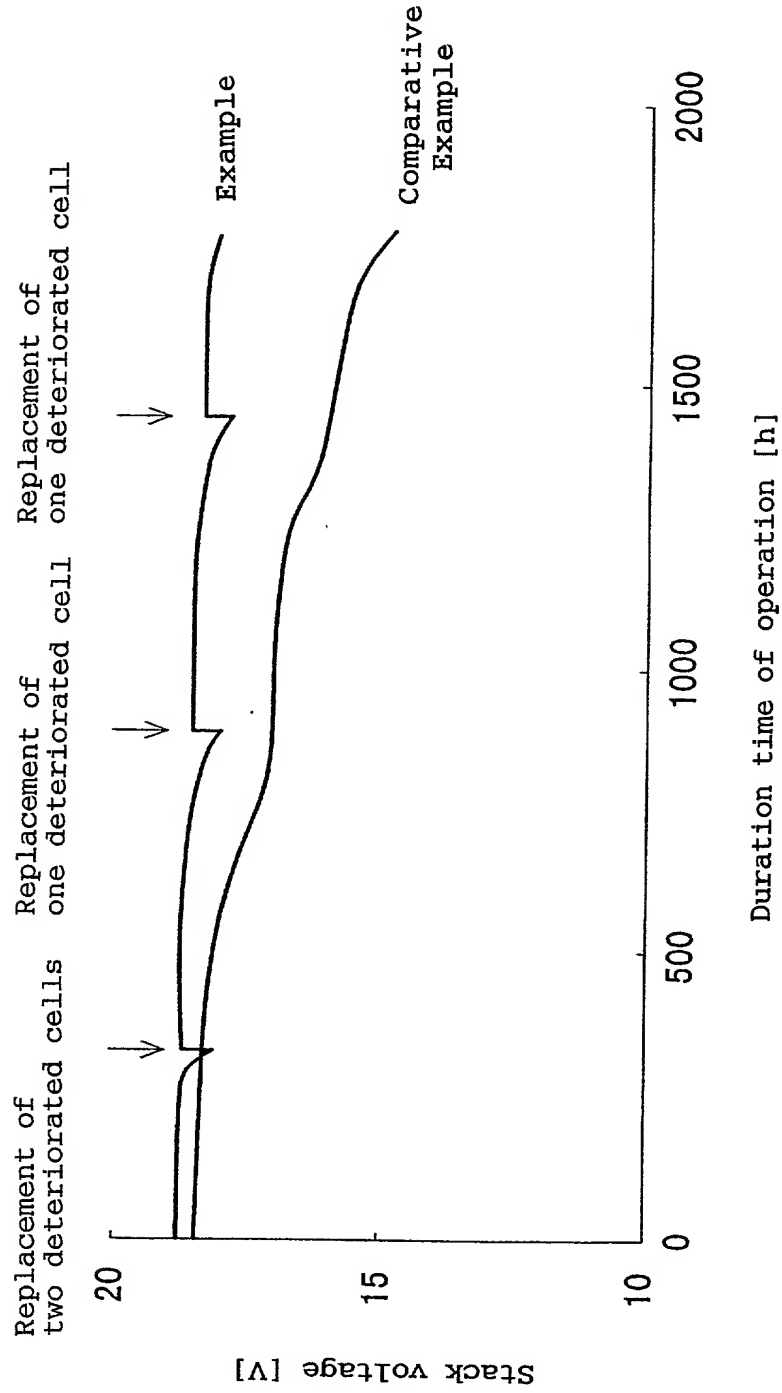


FIG. 7

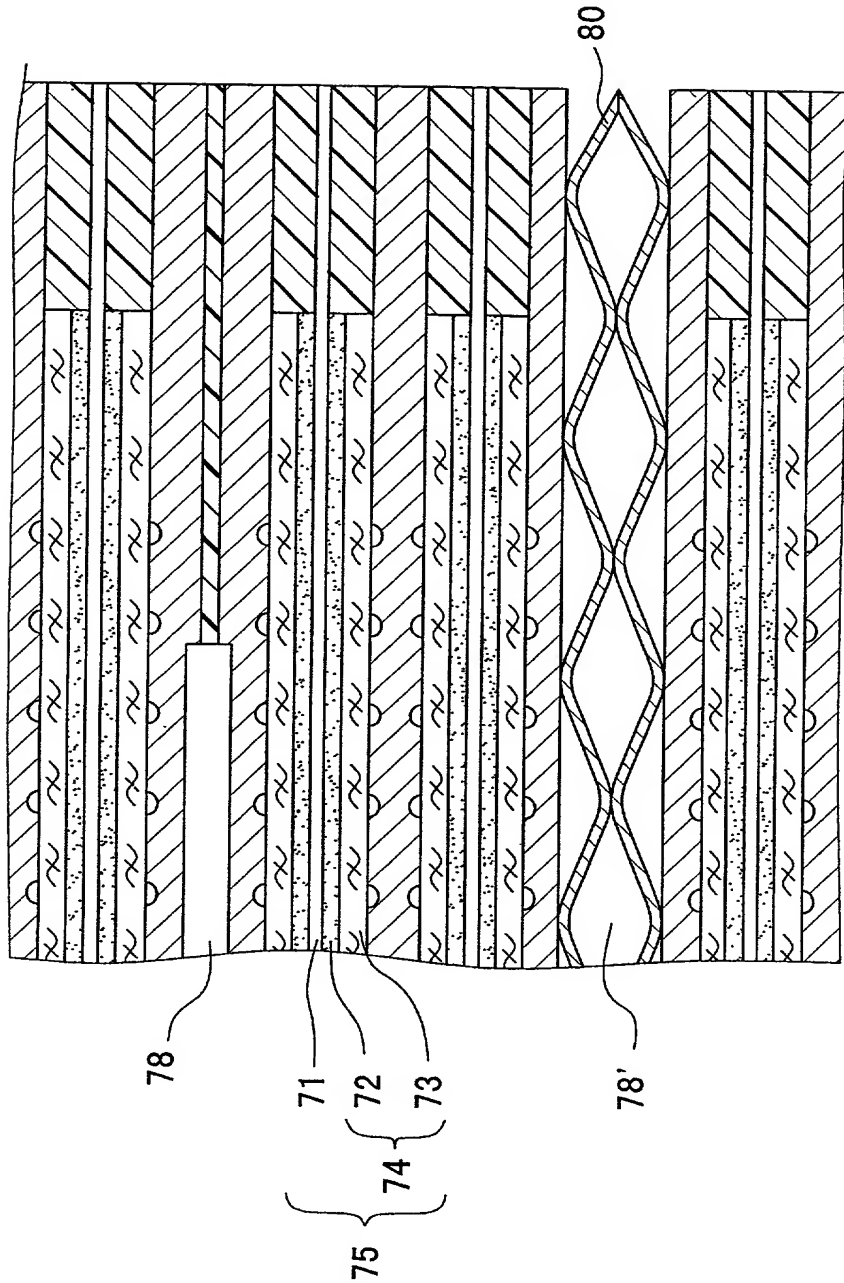

Attorney Docket No.: 10059-400US  
Ref. No.: P23013-01

**DECLARATION AND POWER OF ATTORNEY**  
(Original Application)

As a below named inventor, I hereby declare that:  
My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

# Polymer electrolyte fuel cell and method of using the same

the specification of which is attached hereto and/or was filed on May 22, 2000  
as Application No. PCT/JP00/03275 .

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to herein.

I acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**FOREIGN PRIORITY APPLICATION(S)**

## Patent Application

Priority Claimed

Hei 11-149895	Japan	28 May, 1999
(Number)	(Country)	(Day / month / year filed)

☒ Yes    ☐ No

(Number)	(Country)	(Day / month / year filed)
1	USA	15 / 05 / 2018
2	USA	15 / 05 / 2018
3	USA	15 / 05 / 2018
4	USA	15 / 05 / 2018
5	USA	15 / 05 / 2018
6	USA	15 / 05 / 2018
7	USA	15 / 05 / 2018
8	USA	15 / 05 / 2018
9	USA	15 / 05 / 2018
10	USA	15 / 05 / 2018
11	USA	15 / 05 / 2018
12	USA	15 / 05 / 2018
13	USA	15 / 05 / 2018
14	USA	15 / 05 / 2018
15	USA	15 / 05 / 2018
16	USA	15 / 05 / 2018
17	USA	15 / 05 / 2018
18	USA	15 / 05 / 2018
19	USA	15 / 05 / 2018
20	USA	15 / 05 / 2018
21	USA	15 / 05 / 2018
22	USA	15 / 05 / 2018
23	USA	15 / 05 / 2018
24	USA	15 / 05 / 2018
25	USA	15 / 05 / 2018
26	USA	15 / 05 / 2018
27	USA	15 / 05 / 2018
28	USA	15 / 05 / 2018
29	USA	15 / 05 / 2018
30	USA	15 / 05 / 2018
31	USA	15 / 05 / 2018
32	USA	15 / 05 / 2018
33	USA	15 / 05 / 2018
34	USA	15 / 05 / 2018
35	USA	15 / 05 / 2018
36	USA	15 / 05 / 2018
37	USA	15 / 05 / 2018
38	USA	15 / 05 / 2018
39	USA	15 / 05 / 2018
40	USA	15 / 05 / 2018
41	USA	15 / 05 / 2018
42	USA	15 / 05 / 2018
43	USA	15 / 05 / 2018
44	USA	15 / 05 / 2018
45	USA	15 / 05 / 2018
46	USA	15 / 05 / 2018
47	USA	15 / 05 / 2018
48	USA	15 / 05 / 2018
49	USA	15 / 05 / 2018
50	USA	15 / 05 / 2018
51	USA	15 / 05 / 2018
52	USA	15 / 05 / 2018
53	USA	15 / 05 / 2018
54	USA	15 / 05 / 2018
55	USA	15 / 05 / 2018
56	USA	15 / 05 / 2018
57	USA	15 / 05 / 2018
58	USA	15 / 05 / 2018
59	USA	15 / 05 / 2018
60	USA	15 / 05 / 2018
61	USA	15 / 05 / 2018
62	USA	15 / 05 / 2018
63	USA	15 / 05 / 2018
64	USA	15 / 05 / 2018
65	USA	15 / 05 / 2018
66	USA	15 / 05 / 2018
67	USA	15 / 05 / 2018
68	USA	15 / 05 / 2018
69	USA	15 / 05 / 2018
70	USA	15 / 05 / 2018
71	USA	15 / 05 / 2018
72	USA	15 / 05 / 2018
73	USA	15 / 05 / 2018
74	USA	15 / 05 / 2018
75	USA	15 / 05 / 2018
76	USA	15 / 05 / 2018
77	USA	15 / 05 / 2018
78	USA	15 / 05 / 2018
79	USA	15 / 05 / 2018
80	USA	15 / 05 / 2018
81	USA	15 / 05 / 2018
82	USA	15 / 05 / 2018
83	USA	15 / 05 / 2018
84	USA	15 / 05 / 2018
85	USA	15 / 05 / 2018
86	USA	15 / 05 / 2018
87	USA	15 / 05 / 2018
88	USA	15 / 05 / 2018
89	USA	15 / 05 / 2018
90	USA	15 / 05 / 2018
91	USA	15 / 05 / 2018
92	USA	15 / 05 / 2018
93	USA	15 / 05 / 2018
94	USA	15 / 05 / 2018
95	USA	15 / 05 / 2018
96	USA	15 / 05 / 2018
97	USA	15 / 05 / 2018
98	USA	15 / 05 / 2018
99	USA	15 / 05 / 2018
100	USA	15 / 05 / 2018

☐ Yes    ☐ No

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional patent application(s) listed below and have also identified below any United States provisional patent application(s) having a filing date before that of the application on which priority is claimed:

PROVISIONAL PRIORITY PATENT APPLICATION(S)

Priority Claimed

(Application No.) (Filing Date)

☐ Yes    ☐ No

(Application No.) (Filing Date)

☐ Yes    ☐ No

And I hereby appoint the registered attorneys and agents associated with Akin, Gump, Strauss, Hauer & Feld, L.L.P., Customer No. 000570, as my attorneys or agents with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to Customer No. 000570, namely, Akin, Gump, Strauss, Hauer & Feld, L.L.P., One Commerce Square, 2005 Market Street, Suite 2200, Philadelphia, Pennsylvania 19103. Please direct all communications and telephone calls to

William W. Schwarze at (215)965- 1270.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole

or first inventor Osamu SAKAI

Inventor's Signature

*Osamu Sakai*

Date 13 Sep., 2001

Residence Neyagawa-shi, Osaka Japan

Citizenship Japanese

Post Office Address 3-14-330, Miyukihigashimachi, Neyagawa-shi, Osaka 572-0055 Japan

Full name of second joint

inventor, if any Hisaaki GYOTEN

Inventor's Signature

*Hisaaki Gyoten*

Date 14 Sep., 2001

Residence Shijonawate-shi, Osaka Japan

Citizenship Japanese

Post Office Address 3-10-2, Tawaradai, Shijonawate-shi, Osaka 575-0013 Japan

30 Full name of third joint  
inventor, if any Kazuhito HATOH  
Inventor's Signature Kazuhito Hatoh  
Date 14 Sep., 2001  
Residence Osaka-shi, Osaka Japan Sp  
Citizenship Japanese  
Post Office Address 1-2-7-2610, Shigita, Joto-ku, Osaka-shi, Osaka 536-0015 Japan

40 Full name of fourth joint  
inventor, if any Eiichi YASUMOTO  
Inventor's Signature Eiichi Yasumoto  
Date 14 Sep., 2001  
Residence Soraku-gun, Kyoto Japan Sp  
Citizenship Japanese  
Post Office Address 4-25-13, Seikadai, Seikacho, Soraku-gun, Kyoto 619-0238 Japan

50 Full name of fifth joint  
inventor, if any Kazufumi NISHIDA  
Inventor's Signature Kazufumi Nishida  
Date 17 Sep., 2001  
Residence Moriguchi-shi, Osaka Japan Sp  
Citizenship Japanese  
Post Office Address Room 202, Haitsu-Nishiguchi, 18-4, Dainichihigashimachi, Moriguchi-shi, Osaka 570-0016 Japan

60 Full name of sixth joint  
inventor, if any Makoto UCHIDA  
Inventor's Signature Makoto Uchida  
Date 14 Sep., 2001  
Residence Hirakata-shi, Osaka Japan Sp  
Citizenship Japanese  
Post Office Address 2-16-2, Koganeno, Hirakata-shi, Osaka 573-1145 Japan

Full name of seventh joint

inventor, if any Hideo OHARA

Inventor's Signature Hideo Ohara

Date 18 Sep., 2001

Residence Katano-shi, Osaka Japan

Citizenship Japanese

Post Office Address 7-67-4, Hoshida, Katano-shi, Osaka 576-0016 Japan

Full name of eighth joint

inventor, if any Yasushi SUGAWARA

Inventor's Signature Yasushi Sugawara

Date 13 Sep., 2001

Residence Settsu-shi, Osaka Japan

Citizenship Japanese

Post Office Address 1-6-302, Higashishojaku, Settsu-shi, Osaka 566-0025 Japan

Full name of ninth joint

inventor, if any Junji MORITA

Inventor's Signature Junji Morita

Date 13 Sep., 2001

Residence Moriguchi-shi, Osaka Japan

Citizenship Japanese

Post Office Address 1-4-25, Hashibahigashinomachi, Moriguchi-shi, Osaka 570-0031 Japan

Full name of tenth joint

inventor, if any Toshihiro MATSUMOTO

Inventor's Signature Toshihiro Matsumoto

Date 13 Sep., 2001

Residence Ibaraki-shi, Osaka Japan

Citizenship Japanese

Post Office Address 8-31-501, Suehirocho, Ibaraki-shi, Osaka 567-0821 Japan

110-00  
Full name of eleventh joint

inventor, if any Teruhisa KANBARA

Inventor's Signature

Teruhisa Kanbara.

Date 13, Sep., 2001

Residence Ikeda-shi, Osaka Japan

Citizenship Japanese

Post Office Address 1-8-13, Hata, Ikeda-shi, Osaka 563-0021 Japan